


Art. 1098 - COLLARE PESANTE

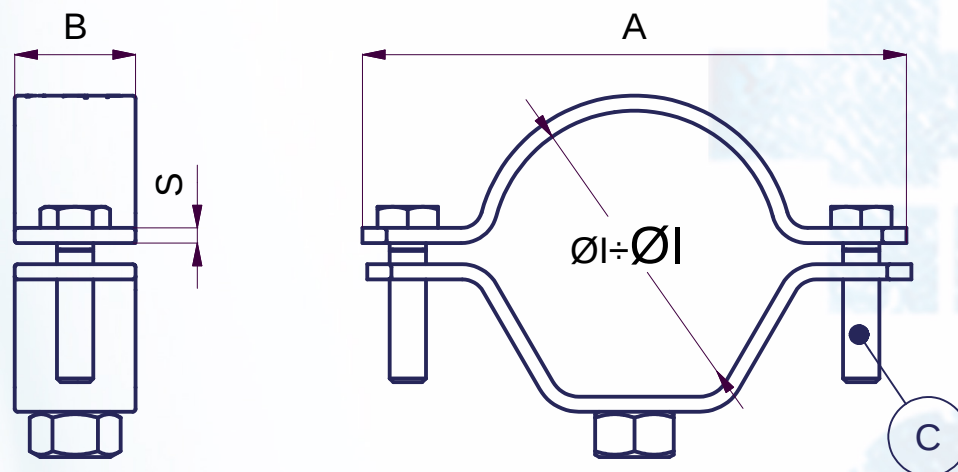

Ø Tubo	ØI ÷ ØI [mm]	A ± 2 [mm]	B [mm]	S [mm]	C [mm]					F _v [Kg]	Note
3/8"	16÷20	54	20	2,5	M6x20	M8	M8 x 80	10 x 50	10	350	
1/2"	20÷24	60	20	2,5	M6x20	M8	M8 x 80	10 x 50	10	350	
3/4"	25÷30	65	20	2,5	M6x20	M8	M8 x 80	10 x 50	10	350	
1"	32÷36	73	20	2,5	M6x20	M8	M8 x 80	10 x 50	10	350	
1.1/4"	38÷44	86	20	2,5	M6x20	M8	M8 x 80	10 x 50	10	350	
1.1/2"	46÷50	91	20	2,5	M6x20	M8	M8 x 80	10 x 50	10	350	
2"	58÷62	106	20	2,5	M6x20	M8	M8 x 80	10 x 50	10	350	
2.1/2"	74÷80	122	30	2,5	M6x20	M10	M10 x 100	12 x 60	12	350	(*)
3"	84÷89	137	30	2,5	M6x20	M10	M10 x 100	12 x 60	12	350	(*)
4"	112÷118	164	30	2,5	M6x20	M10	M10 x 100	12 x 60	12	350	(*)
5"	134÷138	192	30	2,5	M6x20	M10	M10 x 100	12 x 60	12	350	(*)
6"	164÷172	218	30	2,5	M6x20	M10	M10 x 100	12 x 60	12	400	(*)
8"	219÷225	303	40	4	M8x20	M10	M10 x 100	12 x 60	12	600	(*)

(*)- Base collare di forma circolare

F_v - Carico raccomandato di trazione.

