



B/IM902 - VALVOLA A SFERA 2 PZ PASSAGGIO TOTALE

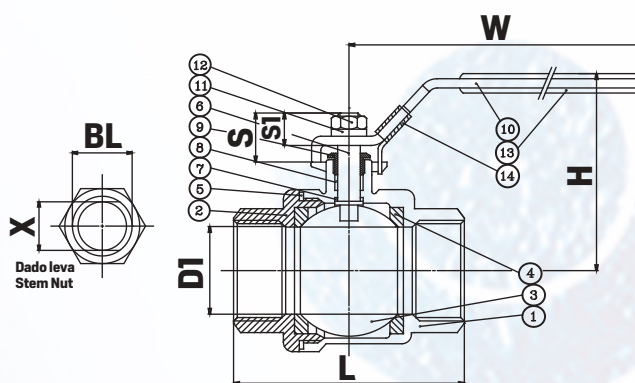

DN	DN inch	D1 mm	L mm	H mm	W mm	S mm	S1 mm	X mm	BL	
8	1/4"	11,6	50	48	98	16,5	10,2	5	M8	200
10	3/8"	12,5	50	48	98	16,5	10,2	5	M8	210
15	1/2"	15	60	53	98	15,5	11	5	M8	290
20	3/4"	20	65	61	120	20	13,5	6	M8	440
25	1"	25	80	65	154	23,5	16	7	M10	620
32	1 1/4"	32	92	79	154	23,5	16	7	M10	1080
40	1 1/2"	38	105	83	184	25,5	17	8	M12	1490
50	2"	50	125	97	184	25,5	17	8	M12	2560
65	2 1/2"	65	156	129	245	41	29,5	12	M16	5040
80	3"	76	183	138	245	41	29,5	12	M16	8150

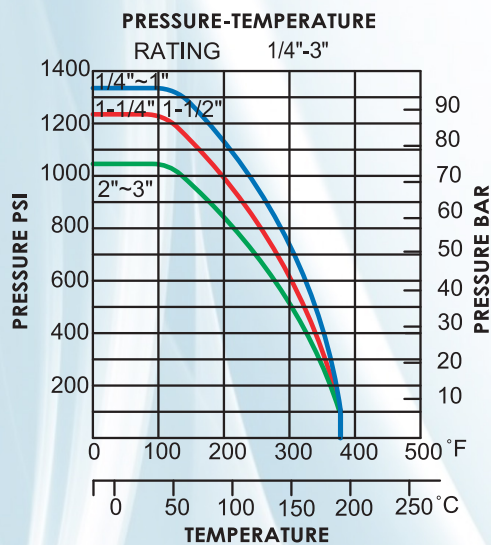

POS.	PARTICOLARE - DETAIL	MATERIALE - MATERIAL	POS.	PARTICOLARE - DETAIL	MATERIALE - MATERIAL
1	Corpo - Body	AISI 316 - 1.440 8	8	Tenuta stelo - Stem packing	PTFE
2	Tappo - Cap	AISI 316 - 1.440 8	9	Dado premistoppa - Gland nut	AISI 304 - 1.4301
3	Sfera - Ball	AISI 316 - 1.440 8	10	Leva - Handle	AISI 304 - 1.4301
4	Anello di sede - Ball seat	PTFE	11	Rondella "grower" - Spring washer	AISI 304 - 1.4301
5	Guarnizione - Joint gasket	PTFE	12	Dado leva - Stem Nut	AISI 304 - 1.4301
6	Stelo - Stem	AISI 316 - 1.4401	13	Copertura leva - Plastic cover	PVC
7	Rondella di spinta - Thrust washer	PTFE	14	Lucchetto - Lock device	AISI 304 - 1.4301