


CF3D e SS

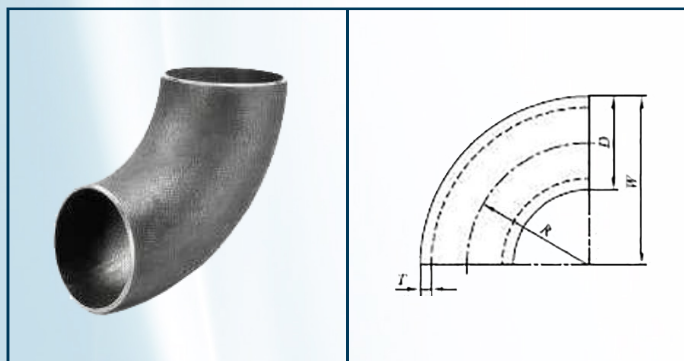

CURVE SENZA SALDATURA E SALDATE R=1,5D DIMA 3

EN 10253-2 TIPO A S235 - P235GH - P265GH

Ø EST.MM OUTS. DIAM MM	SPESSORE THICKNESS	RAGGIO RADIUS	W	PESO TEORICO THEORETICAL WEIGHT KG
88,90	3,20	114	159	1,22
	3,60			1,36
	4,00			1,51
	4,50			1,69
	5,00			1,86
	5,60			2,07
	6,30			2,31
	7,10			2,58
	8,00			2,87
	12,50			4,24
101,60	3,60	133	184	1,83
	4,00			2,02
	4,50			2,26
	5,00			2,50
	5,60			2,78
114,30	3,60	152	210	2,36
	4,00			2,61
	4,50			2,92
	5,00			3,23
	5,60			3,60
	6,30			4,02
	7,10			4,50
	8,00			5,03
	8,80			5,49
	12,50			7,52
139,70	4,00	190	260	4,01
	4,50			4,49
	5,00			4,97
	5,60			5,54
	6,30			6,20
	7,10			6,95
	8,80			8,50
	10,00			9,57

Ø EST.MM OUTS. DIAM MM	SPESSORE THICKNESS	RAGGIO RADIUS	W	PESO TEORICO THEORETICAL WEIGHT KG
168,30	4,50	229	313	6,53
	5,00			7,23
	5,60			8,07
	6,30			9,04
	7,10			10,10
	8,80			12,40
219,10	6,30	305	415	15,80
	7,10			17,80
	8,00			20,00
	8,80			21,90
	10,00			24,70
	12,50			30,50
273,00	6,30	381	517	24,80
	7,10			27,90
	8,00			31,30
	8,80			34,30
	10,00			38,80
	12,50			48,10
323,90	7,10	457	619	39,80
	8,00			44,70
	8,80			49,10
	10,00			55,60
	12,50			68,90
355,60	8,00	533	711	57,50
	8,80			63,10
	10,00			71,40
	12,50			88,60
406,40	8,80	609	813	82,60
	10,00			93,60
	12,50			116,00
457,00	10,00	686	914	119,00
	12,50			148,00
508,00	11,00	762	1016	161,00
	12,50			183,00
609,60	12,50	914	1219	260,00